09-29-00

A

Please type a plus sign (+) inside this box ➜ ⊞

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.	JW-DG-668
First Inventor	ERICSON, George M.
Title	SWITCH-BASED ACCELERATION OF COMPUTER DATA STORAGE EMPLOYING AGGREGATIONS OF DISK ARRAYS
Express Mail Label No.	EK591633803US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. [X] Fee Transmittal Form (e.g., PTO/SB/17)
   (Submit an original and a duplicate for fee processing)

2. [ ] Applicant claims small entity status.
   See 37 CFR 1.27.

3. [X] Specification [*Total Pages* 38]
   (preferred arrangement set forth below)
   - Descriptive title of the invention
   - Cross Reference to Related Applications
   - Statement Regarding Fed sponsored R & D
   - Reference to sequence listing, a table, or a computer program listing appendix
   - Background of the Invention
   - Brief Summary of the Invention
   - Brief Description of the Drawings *(if filed)*
   - Detailed Description
   - Claim(s)
   - Abstract of the Disclosure

4. [X] Drawing(s) *(35 U.S.C. 113)* [*Total Sheets* 7]

5. Oath or Declaration [*Total Pages* 3]
   a. [X] Newly executed (original or copy)
   b. [ ] Copy from a prior application (37 CFR 1.63 (d))
      (for continuation/divisional with Box 17 completed)
      i. [ ] **DELETION OF INVENTOR(S)**
         Signed statement attached deleting inventor(s)
         named in the prior application, see 37 CFR
         1 63(d)(2) and 1 33(b)

6. [ ] Application Data Sheet. See 37 CFR 1.76

ADDRESS TO:
Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

7. [ ] CD-ROM or CD-R in duplicate, large table or
   Computer Program (*Appendix*)

8. Nucleotide and/or Amino Acid Sequence Submission
   (if applicable, all necessary)
   a. [ ] Computer Readable Form (CRF)
   b. Specification Sequence Listing on:
      i. [ ] CD-ROM or CD-R (2 copies); or
      ii. [ ] paper
   c. [ ] Statements verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

9. [X] Assignment Papers (cover sheet & document(s))
10. [ ] 37 CFR 3.73(b) Statement   [X] Power of
    (when there is an assignee)   Attorney
11. [ ] English Translation Document *(if applicable)*
12. [ ] Information Disclosure   [ ] Copies of IDS
    Statement (IDS)/PTO-1449   Citations
13. [ ] Preliminary Amendment
14. [X] Return Receipt Postcard (MPEP 503)
    (Should be specifically itemized)
15. [ ] Certified Copy of Priority Document(s)
    (if foreign priority is claimed)
16. [ ] Other: ....
    ....

17. If a CONTINUING APPLICATION, *check appropriate box, and supply the requisite information below and in a preliminary amendment, or in an Application Data Sheet under 37 CFR 1.76:*

[ ] Continuation   [ ] Divisional   [ ] Continuation-in-part (CIP)   of prior application No _____/_____

Prior application information   Examiner_____   Group / Art Unit _____

For CONTINUATION OR DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 5b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation <u>can only</u> be relied upon when a portion has been inadvertently omitted from the submitted application parts.

18. CORRESPONDENCE ADDRESS

[ ] Customer Number or Bar Code Label   or [X] Correspondence address below

Name	Robert L. Dulaney
Address	EMC CORPORATION 35 PARKWOOD DRIVE
City	HOPKINTON	State	MA	Zip Code	01748
Country	U.S.A.	Telephone	508-435-1000	Fax	

Name (Print/Type)	JOEL WALL	Registration No. (Attorney/Agent)	25,648
Signature	Joel Wall	Date	9-28-2000

Attorney's Docket No. JW – DG-668; EMC Corp. Assignee Docket No. DG - 668

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re: Application of George M. Ericson et al)

For: Switch-Based Acceleration of Computer)
    Data Storage Employing Aggregations of)
    Disk Arrays)

Docket Number: JW-DG-668)

September 28, 2000

BOX PATENT APPLICATION
Assistant Commissioner for Patents
Washington, D.C. 20231
Attention: NEW APPLICATIONS

Sir:

Enclosed herewith for filing is the above-captioned patent application. The following items are enclosed herewith:

1. Utility Patent Application Transmittal Form PTO/SB/05
2. Fee Transmittal for FY 2000 Form PTO/SB/17 (in duplicate)
3. Executed Assignment of Patent Application (three pages) with Recordation Form Cover Sheet Form PTO-1619A
4. Patent Application – 38 pages total including claims and abstract
5. Executed Declaration (three pages) stapled to back of Patent Application
6. Drawings – seven sheets with identification information on reverse sides
7. Return prepaid postcard

Respectfully submitted,

JOEL WALL – REG # 25,648

CERTIFICATION UNDER 37 C.F.R. SECTION 1.16

I hereby certify that this New Application Transmittal and the documents referred to as attached therein are being deposited with the United States Postal Service on September 28, 2000 in an envelope as "Express Mail Post Office to Addressee", mailing Label Number EK591633803US, addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

JOEL WALL

FEE TRANSMITTAL
for FY 2000

Patent fees are subject to annual revision

TOTAL AMOUNT OF PAYMENT   ($) *1378⁻*

Complete if Known	
Application Number	
Filing Date	*9-28-2000*
First Named Inventor	*ERICSON, GEORGE M.*
Examiner Name	
Group Art Unit	
Attorney Docket No.	*JW-DG-668*

METHOD OF PAYMENT (check one)

1. ☒ The Commissioner is hereby authorized to charge indicated fees and credit any overpayments to

Deposit Account Number **05-0889**

Deposit Account Name **EMC CORPORATION**

☒ Charge Any Additional Fee Required Under 37 CFR 1 16 and 1 17

☐ Applicant claims small entity status See 37 CFR 1 27

2. ☐ **Payment Enclosed:**
☐ Check ☐ Credit card ☐ Money Order ☐ Other

FEE CALCULATION

1. BASIC FILING FEE

Large Entity Fee Code	Fee ($)	Small Entity Fee Code	Fee ($)	Fee Description	Fee Paid
101	(690)	201	345	Utility filing fee	*690*
106	310	206	155	Design filing fee	
107	480	207	240	Plant filing fee	
108	690	208	345	Reissue filing fee	
114	150	214	75	Provisional filing fee	

SUBTOTAL (1) ($) *690*

2. EXTRA CLAIM FEES

	Extra Claims	Fee from below	Fee Paid
Total Claims *30* -20** =	*10*	X *18*	= *180*
Independent Claims *9* - 3** =	*6*	X *78*	= *468*
Multiple Dependent			=

**or number previously paid, if greater, For Reissues, see below*

Large Entity Fee Code	Fee ($)	Small Entity Fee Code	Fee ($)	Fee Description
103	18	203	9	Claims in excess of 20
102	78	202	39	Independent claims in excess of 3
104	260	204	130	Multiple dependent claim, if not paid
109	78	209	39	** Reissue independent claims over original patent
110	18	210	9	** Reissue claims in excess of 20 and over original patent

SUBTOTAL (2) ($) *648*

FEE CALCULATION (continued)

3. ADDITIONAL FEES

Large Entity Fee Code	Fee ($)	Small Entity Fee Code	Fee ($)	Fee Description	Fee Paid
105	130	205	65	Surcharge - late filing fee or oath	
127	50	227	25	Surcharge - late provisional filing fee or cover sheet	
139	130	139	130	Non-English specification	
147	2,520	147	2,520	For filing a request for *ex parte* reexamination	
112	920*	112	920*	Requesting publication of SIR prior to Examiner action	
113	1,840*	113	1,840*	Requesting publication of SIR after Examiner action	
115	110	215	55	Extension for reply within first month	
116	380	216	190	Extension for reply within second month	
117	870	217	435	Extension for reply within third month	
118	1,360	218	680	Extension for reply within fourth month	
128	1,850	228	925	Extension for reply within fifth month	
119	300	219	150	Notice of Appeal	
120	300	220	150	Filing a brief in support of an appeal	
121	260	221	130	Request for oral hearing	
138	1,510	138	1,510	Petition to institute a public use proceeding	
140	110	240	55	Petition to revive - unavoidable	
141	1,210	241	605	Petition to revive - unintentional	
142	1,210	242	605	Utility issue fee (or reissue)	
143	430	243	215	Design issue fee	
144	580	244	290	Plant issue fee	
122	130	122	130	Petitions to the Commissioner	
123	50	123	50	Petitions related to provisional applications	
126	240	126	240	Submission of Information Disclosure Stmt	
581	(40)	581	40	Recording each patent assignment per property (times number of properties)	*40*
146	690	246	345	Filing a submission after final rejection (37 CFR § 1 129(a))	
149	690	249	345	For each additional invention to be examined (37 CFR § 1 129(b))	
179	690	279	345	Request for Continued Examination (RCE)	
169	900	169	900	Request for expedited examination of a design application	

Other fee (specify) _____

* Reduced by Basic Filing Fee Paid

SUBTOTAL (3) ($) *40*

SUBMITTED BY

Name (Print/Type)	*JOEL WALL*	Registration No (Attorney/Agent)	*25,648*	Telephone	*508-435-4432*
Signature	*Joel Wall*			Date	*9-28-2000*

WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

1   IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

2

3

4   APPLICATION FOR UNITED STATES PATENT

5

6   FOR

7

8   **SWITCH-BASED ACCELERATION OF COMPUTER DATA STORAGE**
9   **EMPLOYING AGGREGATIONS OF DISK ARRAYS**
10

11   Inventors: George Ericson; Robert Solomon; Jeffrey Brown; John Haynes

12

13

14

15

16

17

18

19

20   Attorneys:

21   Joel Wall, Esq.
22   P.O. Box 169
23   Hopkinton, MA 01748
24   508-435-4432
25

1

SWITCH-BASED ACCELERATION OF COMPUTER DATA STORAGE EMPLOYING AGGREGATIONS OF DISK ARRAYS

FIELD OF THE INVENTION

The present invention relates generally to computer data storage systems and, more particularly, relates to acceleration of computer data storage utilizing fibrechannel switches, disk drive aggregators, and arrays of disk drives.

BACKGROUND OF THE INVENTION

Computer systems are pervasive in our society and virtually all human activity is now influenced at least to some extent by existence and usage of these systems. The faster and more efficient these systems are, the better for all concerned. Certain computer systems developing within the technological area known as fibrechannel or fibrechannel networks do offer faster and more efficient operation, not only because of their optically-communicative capability but for other reasons as well. One of the configurations in fibrechannel networks employs multiple disk drive arrays for data storage managed by an aggregator (essentially another array but with much higher intelligence than ordinary arrays and which organizes ordinary arrays into "aggregations") in combination with a fibrechannel switch (another intelligent device which performs a complex switching function under control of at least the aggregator). Typical inter-relationships of computer, aggregator, switch, and storage within fibrechannel networking have been established.

1   Referring to Fig. 1, there is depicted one typical fibrechannel computer system

2 arrangement. Computer hosts 101, 102, and 103 communicate through fibrechannel

3 switch or hub 104, sometimes known as a "fabric". The term "fabric" suggests densely-

4 packed multiple conductors, since internal fibrechannel switch connections can be very

5 dense. The irregularly-shaped "cloud" symbol representing the switch implies an active

6 or changeable entity which is capable of being used or controlled. Front end fabric 104

7 connects to aggregator 105 (typically a RAID system, standing for Redundant Array of

8 Independent/Inexpensive Disks) which, in turn, connects to back end fabric 106 (another

9 fibrechannel switch or hub) to which are connected multiple disk drives 107, 108, 109,

10 and 110. A major goal of this system is efficient movement of data or computer

11 information from hosts to disk drive storage and vice-versa. If all computers

12 communicate directly with all disk drives (and there can be many more than three hosts

13 and four drives, those numbers being represented here only for purposes of clarity of

14 illustration) then highly complex and inefficient operation with multiple hosts competing

15 for the same storage space on the same disk drives, etc. can result. Thus, an aggregator is

16 used to allow communication by computers with drives, but only through the aggregator

17 to improve operation. The aggregator is a highly intelligent and complex device which

18 appears to computers such as hosts 101, 102, and 103 to be a number of disk drives. The

19 aggregator further appears to the computers to be the only disk drives in the system since

20 it "hides" disk drives 107 - 110 connected to the back end fabric. This reduces

21 complexity for computer hosts to a great extent. Further, this introduces a degree of

22 security since all commands relative to data stored on disk drives from hosts must pass

23 through, and thus be "approved" by, the aggregator. Any illegitimate command or

1   operation may be stopped by the aggregator before it does damage. But, unfortunately,

2   the aggregator can become a bottleneck in this configuration between computers and disk

3   drives under certain high-traffic or busy or other conditions. Thus, the aggregating

4   device can introduce "latency" or time delay into system operation and contribute to the

5   very inefficiencies in system operation that it was designed to reduce or eliminate. Under

6   certain circumstances, this can be a serious problem.

7   However, if the back end drives were directly accessible via the front end fabric,

8   the aggregation "bottleneck" would be removed and certain reductions in these latencies

9   might be achieved. In Fig. 2, Host computers 201, 202, and 203 are shown connected to

10   front end fabric - fibrechannel switch 204 to which are also connected aggregator 208 and

11   disk drives 205, 206, and 207. It is to be understood that the number of hosts and drives

12   are not limited to the specific number shown and that many more, or fewer, hosts and

13   drives are intended to be represented by this diagram. In operation, any one or more of

14   the hosts first sends data requests to the aggregator which then enables the disk drives

15   and alerts them that these requests are coming directly to any one or more of them. Then

16   hosts send multiple requests addressed to the disk drives through the switch *directly* to

17   these different drives, accessing these drives in parallel and receiving *directly* back

18   multiple data streams in parallel through the switch, which reduces the latency factor by

19   eliminating at least one "hop" through the aggregator. However this configuration re-

20   introduces the security issue, because these drives, not being "protected" by the

21   aggregator, are more exposed to illegitimate commands in this configuration. Thus, disk

22   drives and computers in this configuration have to contain added intelligence to deal with

1   these security issues and the task of adding this intelligence creates a more complicated

2   and less desirable environment.

3   Referring next to the subject of fibrechannel protocols as further useful

4   background information, a book entitled "Fibre Channel Volume 1 The Basics" by Gary

5   R. Stephens and Jan V. Dedek, published by Ancot Corp, Menlo Park, California, first

6   edition June, 1995, is incorporated by reference herein. Within the computer industry

7   there are highly competitive companies which specialize in design, development and

8   manufacture of these switches, aggregators, memory arrays, and other fibrechannel-

9   related components. If their respective designs are to be employed in the same system, or

10   if multiple systems employing their various designs are networked together, these designs

11   have to mesh together properly for users to derive any benefit from them. This is

12   accomplished by having these companies agree to certain standards sometimes

13   generically known as the "ANSI Fibre Channel Standard". These standards are complex

14   and are negotiated into existence by the very companies that are responsible for creating

15   these fibrechannel-related components. One of the agreedupon products of these

16   negotiations is what is sometimes called the "protocol stack"-- five network levels of

17   fibrechannel. (In computer networks, information or data sent between network devices

18   is conducted on a physical level normally by electrons or photons over copper wires or

19   fibre-optic paths respectively, and/or by telecommunication paths, and, at the same time,

20   is also *virtually* conducted on multiple other network levels above the physical level.)

21   Referring to Fig 3A, five levels: FC-0, FC-1, FC-2, FC-3 and FC-4 are shown,

22   corresponding to: physical, encode/decode (8B/10B), Framing Protocol, Common

23   Services for Ports, and Mapping respectively. {Sometimes, another sixth layer, Upper

1   Layer Protocol, is referred to, and is shown.} Briefly, the FC-0 functional level relates to

2   physical connection of nodes, either optical or electrical – the nuts and bolts of

3   connection. The FC-1 functional level relates to how information is transmitted between

4   fibrechannel input/output ports, i.e. how lasers and electrical drivers/receivers deal with a

5   bit stream moving into and out from a fiber. The FC-2 functional level deals with

6   transferring information and is concerned with its content, proper arrival of content or

7   detection of missing information or information errors; this level thus defines frame fields

8   including frame header field layout and is utilized in embodiments of the present

9   invention. The FC-3 functional level deals with common services that can be shared

10   among ports. And, the FC-4 functional level handles mapping of existing non-

11   fibrechannel I/O interfaces for use on fibrechannel by using fibrechannel tools.

12   The foregoing latency problem of the prior art is addressed and relieved, without

13   reducing security, by the welcome arrival of the present invention which operates not

14   only within parameters of the ANSI Fibre Channel Standard, but, as suggested, makes

15   novel use of fibrechannel level FC-2, as described hereinbelow.

16

17   **SUMMARY OF THE INVENTION**

18   The present invention in a broad aspect relates to a network-attached storage

19   computer system having disk drives and an aggregator attached to the network. Direct or

20   indirect data transfer between computer and disk drives is determined by its impact on

21   overall performance of the system. If determined that indirect transfer would increase

22   overall system performance compared to direct transfer, data is sent between computer

23   and disk drives through the network *and* through the aggregator. If determined that direct

1   transfer would increase overall system performance compared to indirect transfer, data is

2   sent between computer and disk drives through the network but *not* through the

3   aggregator.

4   The present invention in another aspect relates to a computer data storage system

5   wherein data is grouped in frames. There are disk drives or the like for storing and

6   retrieving data and an aggregator or data storage manager for managing operation of the

7   disk drives. Each of the frames includes a frame header which designates parameters

8   associated with data in its frame. One of the parameters is destination ID (identity of the

9   destination). There is a controllable switch connected between computer, disk drives,

10   and aggregator for selecting certain frames and flowing data in those selected frames

11   directly between computer and disk drives. The aggregator is destination ID in the

12   selected frames, but transfer of data in the selected frames between computer and disk

13   drives is direct and not through the aggregator. Thus, latency issues can be reduced or

14   eliminated because of direct flow of data between computer and disk drives, while at the

15   same time not reducing security since the destination ID for data in the selected frames

16   remains the aggregator.

17   In a further feature of the present invention, the switch includes switch control

18   logic under command of the aggregator to select those frames to be transferred directly.

19   The switch control logic includes a frame header field selector such as a frame header

20   mask, an input frame header buffer, and a map table.

21   In yet another aspect, the present invention is incorporated in a computer system

22   including both disk drives or the like for storing and retrieving data grouped in frames

23   and an aggregator normally in the path of the frames flowing between computer and disk

7

1   drives. The present invention employs computer logic and relates to enhancing transfer

2   of data between computer and disk drives. This involves establishing a frame header

3   field selector such as a mask containing only relevant information. The frames including

4   their respective headers are received from the computer, and headers and mask are

5   compared to obtain "distilled" frame headers. A map table is established which contains

6   sets of frame header fields corresponding to input addresses (proxy destination IDs) of

7   the disk drives. The map table is searched to find matches between distilled frame

8   headers and sets of frame header fields. For each match, a proxy destination ID is

9   substituted in place of the original destination ID in headers of each of the corresponding

10   frames which are then forwarded directly to the disk drives and not via the aggregator.

11   This data transfer enhancement operation is not perceptible by the host computer.

12   And in yet another aspect, the present invention relates to a computer program

13   product for use in a computer system employing network-attached storage having both

14   disk drives and a disk drive aggregator attached to the network. There is included a

15   computer usable medium having computer readable program code thereon for enhancing

16   the transfer of data between the computer and the disk drives.

17   It is thus advantageous to use the present invention to reduce latency issues

18   without negatively impacting data security in a network-attached-storage-based computer

19   system.

20   It is a general object of the present invention to provide increased overall system

21   performance in a computer system.

1   If is a further object of the present invention to provide improved performance in

2   storage and retrieval of data in a computer system, including a network-attached-storage

3   computer system.

4   It is an additional object of the present invention to provide apparatus and

5   methodology for allowing direct data flow between a computer system's host computers

6   and disk drives under certain conditions while maintaining data security.

7   It is a still further object of the present invention to provide an improved

8   fibrechannel-based computer system employing multiple disk drives wherein latency

9   normally introduced by bottleneck-operation of an aggregator is reduced or eliminated.

10   Other objects and advantages will be understood after referring to the detailed

11   description of the preferred embodiments and to the appended drawings wherein:

12

13   **BRIEF DESCRIPTION OF THE DRAWINGS**

14   Fig. 1 is a diagram of a prior art arrangement of host computers, fibrechannel

15   switches, aggregator, and disk drives;

16   Fig. 2 is a diagram of another prior art arrangement of host computers,

17   fibrechannel switch, aggregator, and drives;

18   Fig. 3A depicts the fibrechannel levels with their respective designations;

19   Fig. 3B depicts a layout of a typical frame in accordance with fibrechannel level

20   FC-2;

21   Fig. 3C depicts a layout of at least a portion of the fibrechannel level FC-2 frame

22   header of Fig. 3B;

1   Fig. 4 is a schematic diagram of a write command processed in accordance with

2 an embodiment of the present invention;

3   Fig. 5 is a flowchart depicting the algorithmic process performed by the

4 embodiment of the present invention of Fig.4;

5   Fig. 6 depicts a map table listing certain sets of frame header fields associated

6 with their respective proxy destination IDs;

7   Fig. 7 is a schematic diagram of the switch of Fig. 4 showing its switch control

8 logic including the map table of Fig. 6 under command of the aggregator of Fig. 4; and,

9   Fig. 8 is a schematic diagram of a read command processed in accordance with an

10 embodiment of the present invention.

11

12   **DESCRIPTION OF THE PREFERRED EMBODIMENTS**

13   **Figure 3B**

14   Referring to Fig. 3B, a typical fibrechannel frame in accordance with level FC-2

15 of the fibrechannel protocol stack is shown. This frame contains multiple fields which

16 normally contain predetermined ranges of bytes. Typically the opening "idles" field has

17 six transmission words or 24 bytes; "start of frame" (SOF) field has one transmission

18 word or four bytes; the "header" field has six transmission words or 24 bytes and is of

19 primary interest because it relates to the present invention and contains information about

20 its frame's contents or purpose, somewhat analogous to ID/origin/destination information

21 displayed on a human-transit bus above the bus driver's windshield; the "optional

22 headers and payload" field can be the largest field ranging from zero to 528 transmission

23 words or 2112 bytes; "cyclic redundancy check" (CRC) and "end of frame" (EOF) fields

1   are each one transmission word of four bytes each; and closing "idles" field is again six

2   transmission words or 24 bytes.

Figure 3C

4   Referring to Fig. 3C, the frame header of Fig. 2 is expanded to show the five

5   words of interest in this header, the number of bytes per header (four) and various fields

6   associated with particular bytes. The header actually contains six words. Starting at the

7   left-hand side, R_CTL is "routing control" represented by byte zero. D_ID is

8   "destination identity" represented by bytes 1-3. Byte 4 is not used. S_ID is "source

9   identity" and is designated by bytes 5-7. Byte 8 is "type". F_CTL is "frame control" and

10   is designated by bytes 9, A, B. SEQ_ID is "sequence identity" and is byte C. DF_CTL

11   is "data field control" and is byte D. SEQ_CNT is "sequence count" and is designated by

12   bytes E and F. OX_ID is "originator's identity" and is designated by bytes 10-11.

13   Finally, RX_ID is "receiver's identity" and is designated by bytes 12-13. The D_ID,

14   S_ID, and OX_ID fields in this header are utilized by embodiments of the present

15   invention. Other fields may also be used and are selected by the frame header field

16   selector such as a mask or its equivalent. These specific fields and these other fields shall

17   be described more fully hereinbelow.

Figure 4

19   Referring to Fig. 4, a schematic block diagram of a computer system operating in

20   accordance with an illustrative embodiment of the present invention is presented. Host

21   computer 401 is labeled "I" for "initiator"; fibrechannel switch 402 is identified and

22   shown as a box rather than a cloud only for purposes of convenience of illustration;

23   aggregator 403 is labeled "A"; memory array or disk drive group 404 is labeled "Z", and

1   memory array or disk drive group 405 is labeled "Y". These system components are

2   shown as being interconnected by communication paths which are syntactically identified

3   for purposes of ease of description. The syntax is as follows:

4   Command N(S_ID, D_ID, OX_ID)(Proxy x_ID, x)

5   where "Command" is either a "read" from or "write" to memory with respect to host 401,

6   "N" is a number representing communication count in this particular group or exchange

7   of communications, "S" represents source of the command, "D" represents destination of

8   the command, "OX" represents originator's exchange , "Proxy x" represents a substituted

9   source or destination command where "x" represents either substituted source S or

10   substituted destination D, and "ID" stands for the respective component's identity in each

11   case.

Write Command Operation

13   In operation, host computer 401 issues a write request or command with syntax

14   label W1(I,A,1) which stands for: W = Write command; 1 = this is the first

15   communication in this particular exchange of communications designated "1" and

16   pertaining to this Write command; (I = S_ID; A = D_ID; 1 = OX_ID). Switch 402

17   receives W1(I, A, 1) at one of its input ports (not shown in this Fig.) and transfers it

18   through to aggregator 403 via communication path syntactically labeled W2(I,A,1) which

19   is essentially a continuation of W1(I,A,1). In response to W2(I,A,1) aggregator 403

20   issues two commands: a mapping command and a proxy write command. Map command

21   M3(I,A,1)(Z,D) is forwarded to switch 402 over command input port 406 where it

22   commands a mapping function within the switch (to be discussed below). Proxy write

1   command PW4(A,Z,1)(I,S) is also forwarded to switch 402 where it is switched to disk

2   drive Z via the line syntactically labeled PW5(A,Z,1)(I,S).

3   Before proceeding further with the syntactical narrative of Fig. 4, consider what

4   has been thus far represented: A write request is issued by the host computer – it wishes

5   to write data into a disk drive. It sends the request to the aggregator (via the switch)

6   which is in charge of efficiently managing disk drive resources available to the computer.

7   Upon receipt of this write request, the aggregator not only "decides" that this request

8   should be directed to disk drive Z rather than disk drive Y, but also "decides" that it

9   would be in the system's best interests if future communications from Host 401 with

10   respect to this particular write request *not* proceed through the aggregator. Therefore, the

11   aggregator issues a map command to the switch to generate a frame header mask and a

12   map table (both shown in Fig. 7 and to be discussed below) for purposes of diverting

13   certain future communications from initiator 401 to substitute or proxy destination disk

14   drive Z (also to be discussed in detail below). The aggregator further issues a Proxy

15   write command PW4(A,Z,1)(I,S) to communicate to disk drive Z a proxy or substitute

16   source ID, namely that of initiator "I" rather than its own ID. Accordingly, at this point

17   in the communication proceedings for this write command, (1) the switch has been

18   commanded to forward future communications from I for this write command having

19   "A" as destination, from I *directly* to disk drive Z without proceeding through A, and (2)

20   disk drive Z has been "advised" or commanded to substitute initiator "I" as the source for

21   write requests which arrive at Z actually by way of A.

22   Returning, now, to the syntactical description of Fig. 4, disk drive Z responsive to

23   proxy command PW5(A,Z,1)(I,S) issues a transfer ready signal or command identified as

1   X6(A,I,1) which is interpreted as follows: "X" means transfer; "6" is the number

2   corresponding to this sixth communication step in the same originator's exchange

3   process; (source ID is A; destination ID is I; and this is still the same Write request

4   identified by originator's exchange "1"). This transfer ready command goes through

5   switch 402 and via the communicative link syntactically identified as X7(A,I,1) is

6   transferred to its destination, Initiator I, "advising" initiator I that conditions are ready for

7   data to be written. Initiator I, responsive to this transfer ready command, sends data to

8   switch 402 via the communicative link syntactically identified as D8(I,A,1), which stands

9   for: data, the eighth step count in this process, (source is I, *destination is A*, and same

10   write request #1) respectively. The destination was italicized in the prior sentence to

11   emphasize that A shall not receive this data despite destination "A" being designated in

12   the syntax because of map conditions earlier established in the switch (which will be

13   discussed below). In response to the map operation in the switch to be described below,

14   the switch detects a match involving disk drive Z and certain frame header elements,

15   substitutes disk drive Z for aggregator A 403 in the header's D_ID field, and sends this

16   data *directly* to disk drive Z via communicative link identified by D9(I,Z,1). Disk drive Z

17   then completes the proxy write command by issuing back to aggregator A a status signal

18   identified as S10(Z,A,1) where Z is source, A is destination, etc. This status signal goes

19   through the switch and via the link identified by S11(Z,A,1) from the switch to A where

20   it provides a status report to A that the write was successfully completed. At this point, A

21   can dismantle or neutralize the map table it established in the switch, whereupon it issues

22   an "unmap" command UM12(I,A,1) to the switch and the map table is dismantled

23   whereby its operational effect is neutralized.

1   In other words, in the last paragraph and the operation of Fig. 4 thus far, it should

2   be understood that the transfer ready signal advised the computer that conditions are

3   ready for data to be transferred, and that the computer sent the data addressed to the

4   *aggregator A*, via D8(I,A,1). Because of the switch's intelligence it "decided" to not

5   allow this write command to flow to the aggregator, and diverts it by way of the map

6   table directly to disk drive Z on link identified as D9(I,Z,1). After the status report is

7   made from the disk drive via the switch to the aggregator, the aggregator decides to

8   dismantle the map table which it no longer needs for this particular write command, via

9   unmap command UM12(I,A,1).

10   It can be seen that *all* destination ID's for host-originated commands are the

11   aggregator A, as in (note the bold emphasis) W1(I,*A*,1) and D8(I,*A*,1), and, *all* source

12   ID's for host-received commands are aggregator A, as in (again note bold emphasis)

13   X7(*A*,I,1) and S14(*A*,I,1). These results obtain even though the transfer ready command

14   originates on disk drive Z and not A and even though the data command causes data to be

15   written into disk drive Z and not A. Therefore, *from the host's viewpoint, nothing has*

16   *changed with respect to the switch or the aggregator with which it is connected!* This

17   entire proxy operation in redirecting commands directly to specific disk drive

18   components is not perceptible by the host.

19   All commands and signals except for possibly the map/unmap and proxy

20   commands are standard fibrechannel level FC-2 compatible commands. Accordingly,

21   since the syntax of all information transmitted in Fig.4 (except for possibly map/unmap

22   and proxy commands) is solely reflective of fields in the frame header, all such

23   information with possible exceptions noted can fit within the frame header. This

1   embodiment of the present invention takes advantage of the potential afforded by the

2   frame header to insert proxy commands into the header to achieve this important result in

3   latency reduction. Typically, map/unmap commands can be fabricated at the SCSI (small

4   computer system interface) level, or could be at the microcode level in assembler

5   language; alternatively, they can also be FC-2 compatible. In any case, they would be

6   compatible with the fibrechannel switch internals. Furthermore, the proxy commands are

7   proprietary SCSI upper level protocol commands which map to SCSI lower level

8   protocol commands, which are, in turn, mapped onto communications media dependent

9   protocols such as the FC-2 protocol layer.

10   All write command activity shown in Fig. 4 was executed with respect to disk

11   drive Z because of a decision made by the aggregator to use disk drive Z. However, it

12   could have selected disk Y or, alternatively, could have decided to alternate host-initiated

13   write and/or read commands between disk drives Z and Y (and any other disk drives in

14   the system not shown in this Fig.) and permit the system to process these commands

15   virtually in parallel. In the latter alternative case the map operation(to be discussed

16   below) could be extended to include sequence count and sequence ID information from

17   the frame header where the map operation would be more complex. Such syntax would

18   take the following form:

19   Map(S_ID, D_ID, OX_ID, SEQ_ID, SEQ_CNT)[(Proxy x_ID), x]

20   where all items have been previously identified.

21   **Figure 8 – Read Command Operation**

22   A read command example would be similar to the write command example

23   shown, but a map command is not needed because the switch does not need to be

1   involved in the proxy operation for read commands. The transfer ready command is also

2   not needed in a read example because the relationship between (initiator) host computer

3   and (target) disk drive is that the latter drives the sequencing. The host initiator is

4   assumed to be ready, since it initiated the read request. So after the read request is issued,

5   whenever the (target) disk drive is ready to send data, it does. Referring to Fig. 8, there is

6   presented the same schematic block diagram of a computer system as used in Fig. 4, and

7   employing the same syntax, but where disk drive Y, drive 405, is used in this read

8   example instead of reusing disk drive Z, drive 404, for purposes of clarity of presentation.

9   As in the write example, Initiator 401 forwards a read command syntactically identified

10   as R1(I,A,2) with the usual meaning: R = a read request, 1 = the first command in this

11   series, (I = Initiator is the source of the command, A = Aggregator is the destination of

12   the command, and 2 = the second originator's exchange). This read request flows

13   through the switch and via a link identified syntactically as R2(I,A,2) is received by

14   aggregator 403. The aggregator responds by turning the read command into a proxy read

15   request: PR3(A,Y,2)(I,S) which travels through the switch to disk drive Y via the link

16   identified by PR 4(A,Y,2)(I,S). In this proxy command, PR = proxy read; 4 = the fourth

17   command of this originator's exchange; (A = actual source aggregator; Y = actual

18   destination disk drive Y; 2 = second originator's exchange)(I = Initiator as the proxy; and

19   S = "Source", meaning that the aggregator is identifying or substituting the proxy

20   Initiator in the role of source to disk drive Y). Disk drive Y retrieves the data from

21   within its storage and delivers it to the switch over the link identified by syntax:

22   D5(A,I,2), where, as reflected by "A" being in the source position of the syntax, disk

23   drive Y is responding in the role of aggregator as source of the data command thus

1   conforming itself to the appropriate component that would have just received a command

2   from the Initiator, namely, the aggregator. The switch forwards the data to I via the link

3   identified by D6(A,I,2). (Note that "A" is still designated the source although "Y" is the

4   actual source of this data.) Drive Y issues a status confirmation via link identified by

5   S7(Y,A,2) through the switch and via the link identified by S8(Y,A,2) to the aggregator.

6   The aggregator issues a status confirmation to the Initiator via the link identified by

7   S9(A,I,2) through the switch and via the link identified by S10(A,I,2) to the initiator. The

8   major difference(s) between this read example and the prior write example is that the

9   switch does not need to redirect any commands in the read example. Therefore the map

10   command is not needed (and thus the unmap command is not needed).

11   Focusing on the proxy read command PR3(A,Y,2)(I,S) or its continuation

12   PR4(A,Y,2)(I,S) and the responsive data command D5(A,I,2) or its continuation

13   D6(A,I,2), the significance of the functionality expressed by the syntax should not be

14   overlooked. These commands mean that the *aggregator* (which would have otherwise

15   been the source with respect to disk drive Y in an ordinary read command) is sending this

16   *read* command to the *disk drive Y* (which would have otherwise been the destination with

17   respect to the aggregator in an ordinary read command) and is herewith syntactically

18   identified within the proxy command P***R3(A,Y,2)***(I,S) in bold italics. But, this command

19   is a proxy command and is thus sending *additional* information identified in the proxy

20   portion of the command "*P*R3(A,Y,2)***(I,S)***", again in bold italics. The additional

21   information is a request to *substitute the initiator as the source of this command.* This

22   complete proxy command is received by Disk drive Y which *cooperates* and makes that

23   substitution. The result of this cooperation is observable in the responsive data command

1   output by disk drive Y. Disk drive Y sends the data *not* back to A, the actual source of

2   the command, but to I, the proxied or substituted source of the command, *and identifies*

3   *itself in the data command as aggregator A.* Examining the syntax for the data command

4   one observes that *the aggregator is in the position of the source, and the initiator is in the*

5   *position of the destination.* The net effect of these substitutions is that: (1) an additional

6   hop through the aggregator is avoided when data is forwarded from a disk drive

7   responsive to a read request from the initiator – data goes directly to the initiator (albeit

8   through the switch or network)from the drive rather than (again via the switch) back

9   through the aggregator from which the command actually was received, and (2) the host

10   initiator is not impacted since the commands it sends and receives do not suggest

11   anything other than what the host had expected – requests made by and directed from the

12   initiator host to the aggregator as a destination, and data received by the host initiator

13   from the aggregator as a source! Thus, "the host is not in the game", using a colloquial

14   expression to highlight the fact that other components or sub systems in this overall

15   network attached storage system are cooperating or conspiring in a manner to improve

16   throughput and improve other system performance characteristics without the host being

17   aware of these changes, or substitutions, or proxies. And, as noted with the earlier-

18   discussed write example, this entire proxy operation is not perceptible by the host.

19   **Figure 5**

20   Referring next to the flowchart of Fig. 5, it depicts the algorithmic process

21   inherent in operation of switch 402 in the computer system of Fig. 4 for the write

22   command example illustrated. An input frame header (including its complete frame for

23   which the header is identifying information) from the host computer enters an input port

1   on the switch in block 501. It is to be understood that there can be multiple hosts each

2   sending write and/or read commands to this complex switch on its multiple input ports

3   essentially simultaneously, and the switch under control of its aggregator shall be able to

4   process all inputs appropriately. (This singular example of a write command is hereby

5   disclosed for purposes of enhancing clarity of presentation and understanding of

6   operation of the present invention. The corresponding flowchart for the read example

7   would be less complex than this because there is no map table operation associated with

8   the read command.) The algorithmic process moves to block 502 wherein a logical

9   "AND" is performed between the input frame header received and a frame header field

10   selector such as a frame header mask. The mask (more detail of which is presented

11   below in connection with Fig. 7) is a template allowing only information relevant to this

12   process. In other words, there are fields in the fibrechannel FC-2 frame header that may

13   contain information irrelevant to operation of the present invention, and they are filtered

14   out. The result of this logical "AND" step is information equal to or less than the mask

15   information , i.e. a subset of the mask information termed a "distilled frame header".

16   The algorithmic process moves then to decision block 503 wherein the query is

17   presented: is there an entry (i.e.: a set of frame header fields) in the map table matching

18   the distilled frame header? This map table, earlier referred to in connection with

19   description of Fig. 4 and to be described in more detail in connection with Fig. 7

20   hereinbelow, is a dynamic table established in the switch. If the answer is "no", the

21   process moves to block 506 which routes the entire frame associated with the distilled

22   frame header to the destination identified by the original D_ID value in the header, which

23   is a particular output port on the switch and the process is done. On the other hand, if the

1   answer is "yes", then there is a match between the distilled frame header and a particular

2   frame header entry in the map table and the algorithmic process moves to block 504

3   where a substitution takes place. The particular D_ID value corresponding to the

4   matching entry (set of fields) in the table is substituted into the D_ID field in the input

5   frame header in place of the original value thus obtaining a "proxy" frame header. In

6   other words, the result of this operation is a changed input frame header associated with

7   the write command, this change taking place within the switch: the frame header was first

8   "distilled" whereby irrelevant header information for this process was removed, and then

9   the input frame header had its destination changed to this proxy destination. (In

10   summary, Proxy D_ID replaces the header field D_ID and Proxy S_ID replaces the

11   header field S_ID when they are used.) The algorithmic process moves next to block 505

12   where the complete input frame, for which the proxy frame header is its identification, is

13   routed to a *different* particular output port on the switch corresponding to the proxy frame

14   header's D_ID value and the process is done. This means that data associated with this

15   write command will be sent to a destination different from that originally intended,

16   namely *directly* to a disk drive rather than the aggregator, and this change will take place

17   within the switch.

18   **Figure 6**

19   Referring next to Fig 6, map table 600 is presented. This is a table which exists

20   dynamically in fibrechannel switch 402. In other words, this table can be created, table

21   entries can be changed, and the table can be deleted by operation of hardware, firmware,

22   and/or software in the switch and controlled by the switch which is, in turn, controlled by

23   aggregator 403. More detail on this operation will be given with respect to Fig. 7

1   hereinbelow. The table shown has two main columns, the one on the left being sets of

2   Frame Header Fields and the other on the right being Proxy D_ID's. In the Frame

3   Header Fields column are sub columns for S_ID, D_ID, and OX_ID. More sub columns

4   could be entered as may be needed, as for example, entering SEQ_ID and SEQ_CNT to

5   accomodate the disk Z/disk Y alternating scheme described earlier where sequence

6   identity and sequence count are additional fields needed to implement the alternating

7   scheme. Furthermore, this particular table as depicted contains entries that are reflective

8   of the write operation described in connection with Fig. 4 and Fig. 5. The first row, for

9   example, shows a set of earlier discussed values for S_ID, D_ID and OX_ID being

10   associated with a Proxy destination ID known as D_ID"a". Other sets of entries in the

11   table may show different values for S_ID reflective of multiple computer hosts (up to "n"

12   computer hosts) and different values for OX_ID reflective of multiple write commands

13   per host (up to "M" number of originator's exchange write commands with computer

14   host "1", up to "N" number of originator's exchange write commands with computer host

15   "2", and up to "P" number of originator's exchange write commands with computer host

16   "n"). Each of these sets of entries is associated with a particular destination ID as

17   suggested by the column heading, e.g. a particular disk drive. Thus this column under

18   Proxy D_ID's contains a range of destination IDs running; from D_ID"a" to D_ID"zzz"

19   as shown. This nomenclature is intended to be suggestive of a large number of

20   destination IDs and no particular fixed or limited number is intended to be represented

21   hereby. Each of these destination IDs necessarily maps to a particular output port on the

22   switch which connects to an appropriate disk drive. More discussion about this table will

23   be provided in connection with Fig. 7.

1   **Figure 7**

2   Referring next to Fig. 7, switch 402 is shown with input ports 703, output ports

3   704 and 705, and containing, among other things, its switch control logic 700. Among

4   other logic components not shown, switch control logic contains map table 600, frame

5   header field selector or mask 701 and input frame header buffer 702. Map table 600 is

6   the table described in Fig. 6. Header mask 701 and buffer 702 are dynamic constructs

7   which can be implemented or dismantled, and are fashioned from computer hardware,

8   firmware, and/or software within and/or related to the switch. Aggregator 403 commands

9   control logic 700 by way of control port 406 Those skilled in the art and familiar with

10   fibrechannel switches will appreciate how such control logic may be implemented from

11   hardware, firmware and software.

12   In operation, if a write command is forwarded by a host to switch 402, it enters on

13   one of input ports 703. This command is a full frame in fibrechannel protocol as shown

14   in Fig. 3B. As it enters the switch, its header field as shown in Fig. 3C is loaded into

15   header buffer 702, and if there is no prior-established proxy condition where there is no

16   proxy match, the full frame is conducted to aggregator 403. Aggregator 403, as an

17   overseer or manager for multiple disk drives, is aware of the state of activity and traffic

18   regarding all of its disk drives, and makes a decision regarding if it would be in the

19   computer system's overall best interest to (1) have this write command pass through itself

20   to the disk array and then have such command's associated data also pass through itself

21   on its way to the disk drive array, or (2) arrange for a proxy ID so that such data shall

22   pass from the host computer into the switch and then written *directly* into the disk to

23   avoid a bottleneck in the aggregator. Assuming the aggregator decides for a proxy ID, it

1   sends a map command via control port 406 to switch 402 which requests the switch to

2   fabricate input header mask 701. The aggregator signals to the switch in this command

3   precisely what elements should be put into the mask based on existing conditions and on

4   the requirement of handling a write command from the host. Additionally, the aggregator

5   also had commanded the switch control logic in this map command to fabricate map table

6   600 with specific frame header field sets of entries with their corresponding proxy

7   destinations based on existing conditions and on the requirement of handling a write

8   command. Thereupon, the aggregator commands the switch control logic to compare the

9   distilled header mask with the frame header field map table's sets of entries to seek a

10   match and to select the Proxy D_ID associated with that matched entry set as the new

11   switch destination ID for data to be sent by the computer and to be written into the disk

12   drive array. Accordingly, when data is sent by the host [syntax D8(I,A,1) in Fig. 4] to

13   aggregator 403 responsive to a transfer ready command from the specified disk drive

14   [syntax X6(A,I,1)] it first goes to the switch and then by prearranged proxy just described

15   goes directly to disk drives and not to the aggregator.

16   Those skilled in this art including those directly connected with design and

17   development of fibrechannel switches will recognize the fact that implementation of

18   illustrative embodiments of the present invention is within their skills and expertise and

19   will utilize appropriate hardware, firmware, and software to generate the logic to

20   accomplish these implementations. For example, a typical host computer which can be

21   used in connection with the present invention is any Intel, Sun Microsystems, Hewlett

22   Packard or other similar company's computer using a fibrechannel host bus adapter with

23   fabric support. A typical fibrechannel switch which might be used in connection with the

1   present invention and which can be fully implemented for Map/Unmap operations can be

2   obtained from companies such as Brocade, McData, Vixel, or Ancor, etc. Typical disk

3   drives which can be used in connection with the present invention are: any fibrechannel

4   disk drive modified to support proxy read and proxy write. The frame header buffer, map

5   table, frame header mask, and map/unmap commands would typically be implemented by

6   combination of software and hardware in or related to the switch. Aggregator 403 can

7   typically be derived from EMC CLARiiON model nos. 4700 which could have the

8   capabilities called for herein. Furthermore, the specific illustrative embodiments

9   presented are not the only ways of fabricating the present invention. For example, other

10   ways of utilizing a fibrechannel switch to accomplish the goals of the present invention

11   include use of hash table lookups for efficient access to a map table.

12   In a hash table lookup design, decision block 503 in Fig. 5 could be a hashing

13   algorithm. Hashing can take different forms. One form could be to mask off all bits in a

14   field except some bits; the unmasked bits could be either high, or low, or mid order bits.

15   The unmasked bits are used as an index, as an approximation to get to the general area of

16   the correct answer very quickly. An alternative hashing design would take all bits in the

17   field but would fold them together to obtain a smaller number of bits, again to accomplish

18   the very fast approximation objective. There are other hashing designs as well. In any of

19   these hashing designs one can avoid an exhaustive search, entry by entry, using the

20   distilled frame header and each entry set of fields in the map table, as earlier presented.

21   A hashing approach in connection with such a table would provide an output advising

22   whether or not any matches existed in the sampled subset of the table – and if not then the

23   search could move on quickly to the next sampling of entries.

1   The present embodiments are therefore to be considered in all respects as

2   illustrative and not restrictive. For example, the invention need not use a fibrechannel

3   switch; any functionality that is the equivalent of such a switch, such as Infiniband could

4   be utilized with the present invention. The scope of the invention is indicated, therefore,

5   by the appended claims rather than by the foregoing description, and all changes which

6   come within the meaning and range of equivalency of the claims are therefore intended to

7   be embraced therein.

1

2   What is claimed is:

3   1. A storage system for storing data for at least one host computer, said system

4   comprising:

5   a plurality of disk drives for storing and supplying said data;

6   a switch having a plurality of input and output ports, said switch being connected

7   between said plurality of disk drives and said at least one host computer for at least

8   connecting one of said input ports on which said data was received to one of said output

9   ports;

10   an aggregator connected to said switch for at least managing operation of said

11   plurality of disk drives; and,

12   operation coordinating logic operatively coupled to coordinate operation of said

13   plurality of disk drives, said switch, and said aggregator in a manner to control flow of

14   certain of said data between said at least one host computer and said plurality of disk

15   drives to be through said switch and not through said aggregator and in a manner which

16   does not change the operation of said at least one said host computers.

17

18   2. The storage system of claim 1 and wherein said switch is a fibrechannel switch

19   and said operation coordinating logic utilizes protocol including fibrechannel protocol.

20

21   3. The storage system of claim 2 and wherein said fibrechannel protocol includes

22   fibrechannel FC2 frame headers.

23

1   4. The storage system of claim 3 and wherein each of said frame headers has a

2   predetermined set of information fields.

3

4   5. The storage system of claim 4 and wherein said fields include but are not

5   limited to destination ID, source ID, sequence ID, sequence count, originator's exchange

6   ID, and respondent's exchange ID.

7

8   6. The storage system of claim 5 and wherein said operation-coordinating logic

9   includes mapping logic for generating a mapping command designating said host

10   computer as said source ID, said aggregator as said destination ID and a first particular

11   said originator ID, and further having a mapped destination ID which designates a

12   particular one of said plurality of disk drives which is connected to a particular one of

13   said output ports.

14

15   7. The storage system of claim 6 and wherein said operation-coordinating logic

16   includes unmapping logic for generating an unmapping command designating said host

17   computer as said source ID, said aggregator as said destination ID and said first particular

18   said originator ID whereby the effect of the operation of said mapping command is

19   neutralized.

20

21   8. The storage system of claim 6 and wherein said operation-coordinating logic

22   includes proxy logic for generating a proxy command having said aggregator as said

23   source ID, said particular one of said plurality of disk drives as said destination ID, and

1   said first particular originator ID, and further having a proxy destination ID which

2   designates a particular said at least one host computer.

3

4   9. The storage system of claim 7 and wherein said operation-coordinating logic

5   includes transfer-ready logic for generating a transfer-ready command having said

6   aggregator as said source ID, said particular said at least one host computer as said

7   destination ID, and said first particular said originator ID,.

8

9   10. The storage system of claim 7 and wherein said particular said at least one

10   host computer generates data having said at least one host computer as said source ID,

11   said aggregator as said destination ID, and said first particular said originator ID.

12

13   11. The storage system of claim 5 including logic for selecting said certain of

14   said data to obtain particular data words and wherein each of said words is operated upon

15   by said operation-coordinating logic in a manner to steer said each of said such words

16   directly to a particular one of said plurality of disk drives.

17

18

19   12. A computer data storage system wherein said data is grouped in frames,

20   comprising:

21   a plurality of disk drives for storing and retrieving said data;

22   an aggregator for managing operation of said plurality of disk drives;

1   each of said frames including a header containing binary fields designating

2   parameters including at least destination ID, said header being associated with that

3   portion of said data contained within said each of said frames; and,

4   a switch connected between said computer, said disk drives, and said aggregator

5   for both controllably selecting certain ones of said frames and flowing said portion of

6   said data grouped in said certain ones and having said aggregator as said destination ID

7   directly between said computer and said plurality of disk drives, whereby data transfer

8   through said aggregator is avoided for said certain ones of said frames.

9

10   13. The system of claim 12 and wherein said switch includes switch control logic

11   arranged to be commanded by said aggregator to selectively switch said certain ones of

12   said frames directly between said computer and said plurality of disk drives and all other

13   of said frames indirectly therebetween through said aggregator.

14

15   14. The system of claim 13 and wherein said switch control logic includes a

16   frame header field selector, an input frame header buffer, and a map table.

17

18   15. The system of claim 14 and wherein said frame header field selector is a

19   frame header mask.

20

21

22   16. In a computer system including a plurality of disk drives for storing and

23   retrieving data grouped in frames each one of said frames having a frame header

1   including an original destination ID, and an aggregator normally arranged to be in the

2   path of said frames flowing between said computer and said plurality of disk drives, a

3   method for enhancing the transfer of said data between said computer and said plurality

4   of disk drives comprising:

5   a. establishing a frame header field selector designating only information

6   relevant to said method;

7   b. receiving each one of said frames including its respective said frame

8   header from said computer;

9   c. using said frame header field selector with each said respective said

10   frame header to obtain a distilled frame header;

11   d. establishing a map table containing sets of frame header fields each one

12   of said sets of frame header fields corresponding to a proxy destination ID of one of said

13   plurality of disk drives;

14   e. searching said map table for a match between said distilled frame

15   header and at least said one of said sets of frame header fields to obtain a matched frame

16   header field set; and,

17   f. substituting said proxy destination ID in place of said original

18   destination ID in said frame header of each one of said frames corresponding respectively

19   to said matched frame header field set, whereby said each one of said frames is forwarded

20   directly to said particular one of said plurality of disk drives and not via said aggregator.

21

1   17. The method of claim 16 including the operation of forwarding each of said

2   frames other than said frames corresponding respectively to said matched frame header

3   field set to its respective said original destination ID via said aggregator.

4

5   18. The method of claim 16 and wherein the operation of searching said map

6   table utilizes a hash algorithm.

7

8

9   19. In a computer system employing network-attached storage having both disk

10   drives and a disk-drive-aggregator attached to said network, a method for enhancing the

11   transfer of data between said computer and said storage comprising:

12   (a) said aggregator determining if overall performance of said computer system

13   shall be increased if said data should be transferred between said computer and said disk

14   drives either directly through said network or indirectly through said network and said

15   aggregator;

16   (b) if the determination made in step (a) is indirectly through said network and

17   said aggregator, then routing said data between said computer and said disk drives

18   through said network and said aggregator; and,

19   (c) if the determination made in step (a) is directly through said network, then

20   sending said data between said computer and said disk drives through said network but

21   not through said aggregator.

22

1   20. In a computer system employing network-attached storage having both disk

2   drives and a disk-drive aggregator attached to said network, a method for enhancing the

3   transfer of data between said computer and said storage comprising:

4   transferring said data between said computer and said disk drives directly through

5   said network, said data otherwise normally transferring indirectly through said network,

6   by achieving particular cooperation among said aggregator, said network, and said disk

7   drives.

8

9   21. The method of claim 20 and wherein said transferring is performed in a

10   manner not perceptible to said computer.

11

12

13   22. In a computer system including a plurality of disk drives for storing and

14   retrieving data grouped in frames each one of said frames having a frame header

15   including an original destination ID, and an aggregator normally arranged to be in the

16   path of said frames flowing between said computer and said plurality of disk drives,

17   apparatus for enhancing the transfer of said data between said computer and said plurality

18   of disk drives comprising:

19   a. means for establishing a frame header field selector designating only

20   information relevant to said method;

21   b. means for receiving each one of said frames including its respective

22   said frame header from said computer;

1   c. means for using said frame header field selector with each said

2   respective said frame header to obtain a distilled frame header;

3   d. means for establishing a map table containing sets of frame header

4   fields each one of said sets of frame header fields corresponding to a proxy destination ID

5   of one of said plurality of disk drives;

6   e. means for searching said map table for a match between said distilled

7   frame header and at least said one of said sets of frame header fields to obtain a matched

8   frame header field set; and,

9   f. means for substituting said proxy destination ID in place of said

10   original destination ID in said frame header of each one of said frames corresponding

11   respectively to said matched frame header field set, whereby said each one of said frames

12   is forwarded directly to said particular one of said plurality of disk drives and not via said

13   aggregator.

14

15   23. The apparatus of claim 22 including means for forwarding each of said

16   frames other than said frames corresponding respectively to said matched frame header

17   field set to its respective said original destination ID via said aggregator.

18

19   24. The apparatus of claim 23 and wherein means for searching said map table

20   includes means for utilizing a hash algorithm.

21

22

1   25. A computer product for use on a computer system including a plurality of

2   disk drives for storing and retrieving data grouped in frames each one of said frames

3   having a frame header including an original destination ID, and an aggregator normally

4   arranged to be in the path of said frames flowing between said computer and said

5   plurality of disk drives, and a computer usable medium having computer readable

6   program code thereon for enhancing the transfer of said data between said computer and

7   said plurality of disk drives comprising:

8   a. program code for establishing a frame header field selector designating

9   only information relevant to said method;

10   b. program code for receiving each one of said frames including its

11   respective said frame header from said computer;

12   c. program code for using said frame header field selector with each said

13   respective said frame header to obtain a distilled frame header;

14   d. program code for establishing a map table containing sets of frame

15   header fields each one of said sets of frame header fields corresponding to a proxy

16   destination ID of one of said plurality of disk drives;

17   e. program code for searching said map table for a match between said

18   distilled frame header and at least said one of said sets of frame header fields to obtain a

19   matched frame header field set; and,

20   f. program code for substituting said proxy destination ID in place of said

21   original destination ID in said frame header of each one of said frames corresponding

22   respectively to said matched frame header field set, whereby said each one of said frames

1   is forwarded directly to said particular one of said plurality of disk drives and not via said

2   aggregator.

3

4   26.   The computer program product of claim 25 including program code for

5   forwarding each of said frames other than said frames corresponding respectively to said

6   matched frame header field set to its respective said original destination ID via said

7   aggregator.

8

9   27.   The apparatus of claim 26 and wherein program code for searching said map

10 table includes program code for utilizing a hash algorithm.

11

12

13   28.   A computer program product for use in a computer system employing

14 network-attached storage having both disk drives and a disk-drive-aggregator attached to

15 said network, and a computer usable medium having computer readable program code

16 thereon for enhancing the transfer of data between said computer and said storage

17 comprising:

18   (a) said aggregator including program code for determining if overall

19 performance of said computer system shall be increased if said data should be transferred

20 between said computer and said disk drives either directly through said network or

21 indirectly through said network and said aggregator;

1   (b) if the determination made in operation (a) is indirectly through said network

2 and said aggregator, then program code for routing said data between said computer and

3 said disk drives through said network and said aggregator; and,

4   (c) if the determination made in operation (a) is directly through said network,

5 then program code for sending said data between said computer and said disk drives

6 through said network but not through said aggregator.

7

8

9   29. A computer program product for use in a computer system employing

10 network-attached storage having both disk drives and a disk-drive aggregator attached to

11 said network, and a computer usable medium having computer readable program code

12 thereon for enhancing the transfer of data between said computer and said storage

13 comprising:

14   program code for transferring said data between said computer and said disk

15 drives directly through said network, said data otherwise normally transferring indirectly

16 through said network, by achieving particular cooperation among said aggregator, said

17 network, and said disk drives.

18

19   30. The computer program product of claim 29 and wherein both said program

20 code for transferring and the results of the running of said program code for transferring

21 are not perceptible by said computer.

22

1

2

3

4

ABSTRACT OF THE DISCLOSURE

6   There is disclosed apparatus and methodology for enhancing computer system

7   data transfer when writing to network attached storage systems employing FC-2

8   fibrechannel protocol by dynamically reconfiguring a fibrechannel switch in response to

9   map/unmap command controls issued by a disk drive aggregator. The reconfiguration

10   involves fabrication of a dynamic map table having sets of fibrechannel FC-2 header

11   fields and their corresponding new or proxy destination IDs (which correspond to the

12   switch's output ports), and fabrication of both an input frame header buffer for temporary

13   storage purposes and a frame header field selector (which can be a frame header mask)

14   containing only relevant information. The input frame header is temporarily stored in the

15   buffer and the field selector is used to obtain a "distilled" input header which is compared

16   with the dynamic map table of stored header fields to obtain a match. If one of the sets of

17   header fields matches the distilled input header, its corresponding proxy destination or

18   source ID is substituted into the corresponding FC-2 input frame header's destination ID

19   field, whereby write command data transfers are accomplished between host computer

20   and a particular disk drive directly, avoiding the aggregator and latency otherwise

21   introduced by the aggregator. Similar disclosure is provided for read command data.

Host A   Host B   Host C
101   102   103

FRONT
END
FABRIC
104

AGGREGATING DEVICE — 105

BACK
END
FABRIC
106

107 DISK DRIVE   108 DISK DRIVE   109 DISK DRIVE   110 DISK DRIVE

FIG. 1

Host A

Host B

o   o   o   o o

Host N

201

202

203

FRONT
END
FABRIC

204

205

206

207

208

AGGREGATING
DEVICE

FIG. 2

Fibre Channel FC-2 Frame Header

WORD 0						WORD 1			WORD 2				WORD 3				WORD 4		
byte 0	1	2	3		4	5	6	7	8	9	A	B	C	D	E	F	10	11	12	byte 13
R_CTL	D_ID					S_ID			TYPE	F_CTL			SEQ_ID	DF_CTL	SEQ_CNT		OX_ID		RX_ID

FIG. 3C

UPPER LAYER PROTOCOL	ULP
MAPPING	FC-4
COMMON SERVICES FOR PORTS	FC-3
FRAMING PROTOCOL	FC-2
ENCODE/DECODE (8B/10B)	FC-1
PHYSICAL (medium, etc.)	FC-0

FIG. 3A

IDLES	SOF	HEADER	OPTIONAL HEADERS + PAYLOAD	CRC	EOF	IDLES

FIG. 3C

FIG. 3B

FIG. 4

START

INPUT FRAME HEADER ENTERS INPUT PORT ON SWITCH — 501

LOGICAL "AND" INPUT FRAME HEADER WITH FRAME HEADER MASK TO OBTAIN DISTILLED FRAME HEADER — 502

IS THERE AN ENTRY IN MAP TABLE MATCHING DISTILLED FRAME HEADER? — 503

NO

Yes

SUBSTITUTE PARTICULAR D_ID VALUE CORRESPONDING TO MATCHING ENTRY INTO INPUT FRAME HEADER OBTAINING PROXY FRAME HEADER — 504

ROUTE TO OUTPUT PORT ON SWITCH CORRESPONDING TO INPUT FRAME HEADER'S D_ID VALUE — 506

505 — ROUTE TO OUTPUT PORT ON SWITCH CORRESPONDING TO PROXY FRAME HEADER'S D_ID VALUE

DONE

FIG. 5

MAP TABLE 600

FRAME HEADER FIELDS S_ID, D_ID, OX_ID	PROXY D_ID's
I₁ , A , 1	D_ID "a"
I₁ , A , 2	D_ID "b"
I₁ , A , M	—
I₂ , A , 1	—
I₂ , A , 2	—
I₂ , A , N	—
Iₙ , A , 1	—
Iₙ , A , 2	—
Iₙ , A , P	D_ID "zzz"

FIG. 6

600

704

705

703

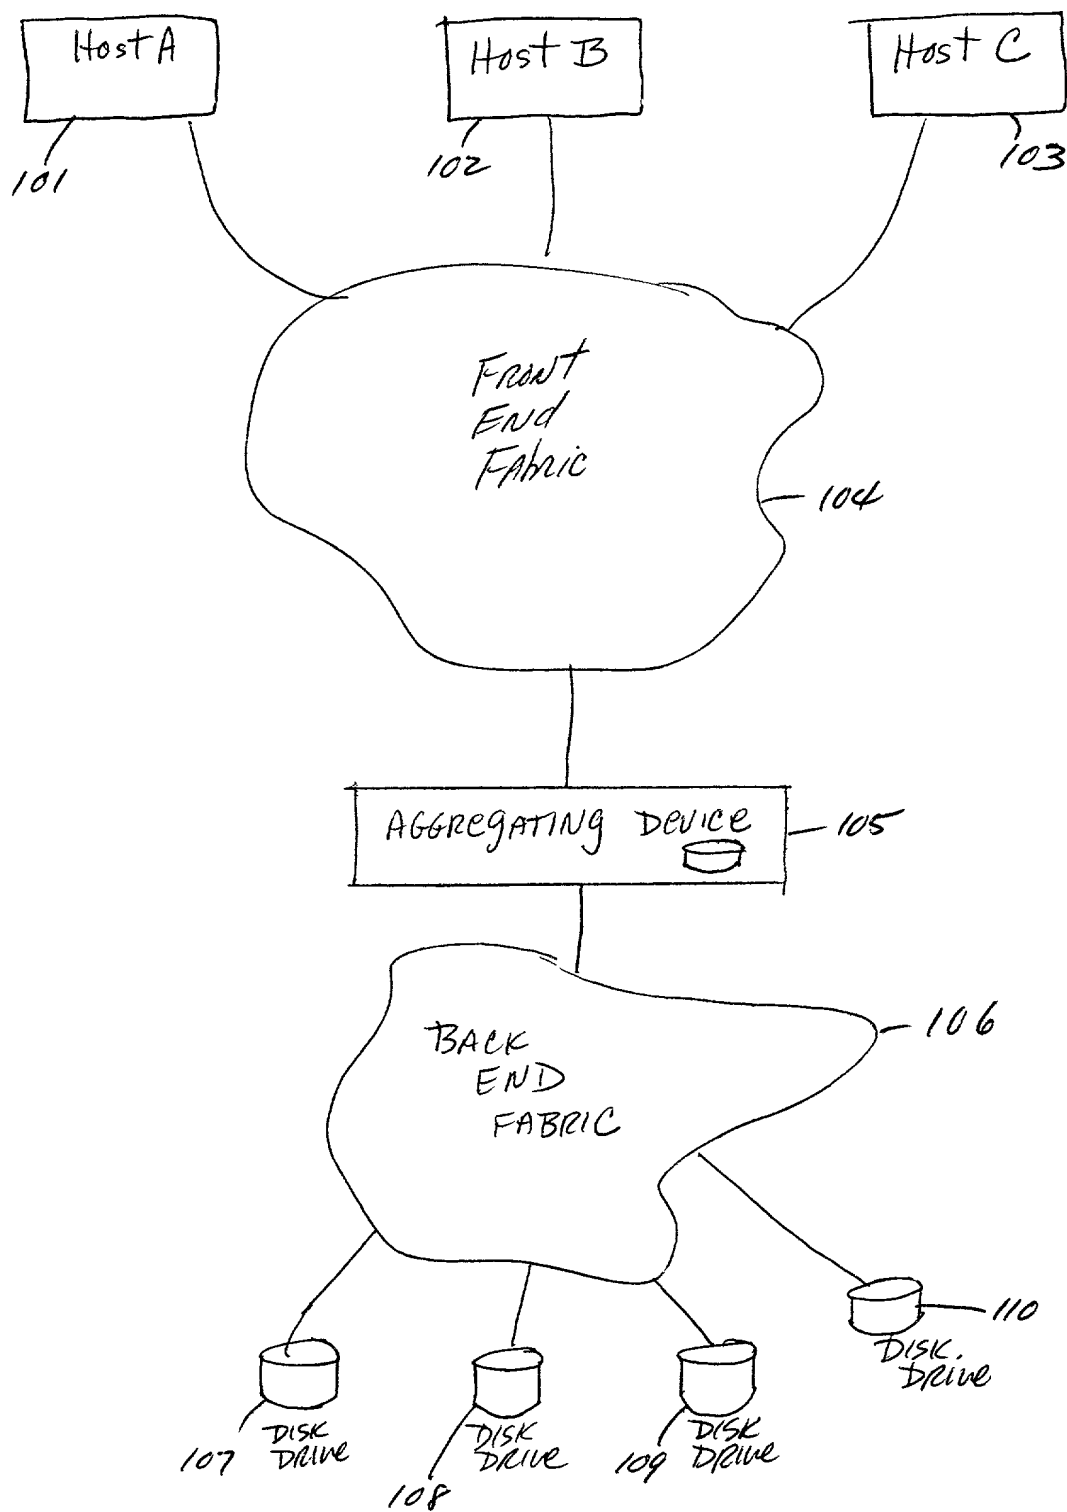702

701
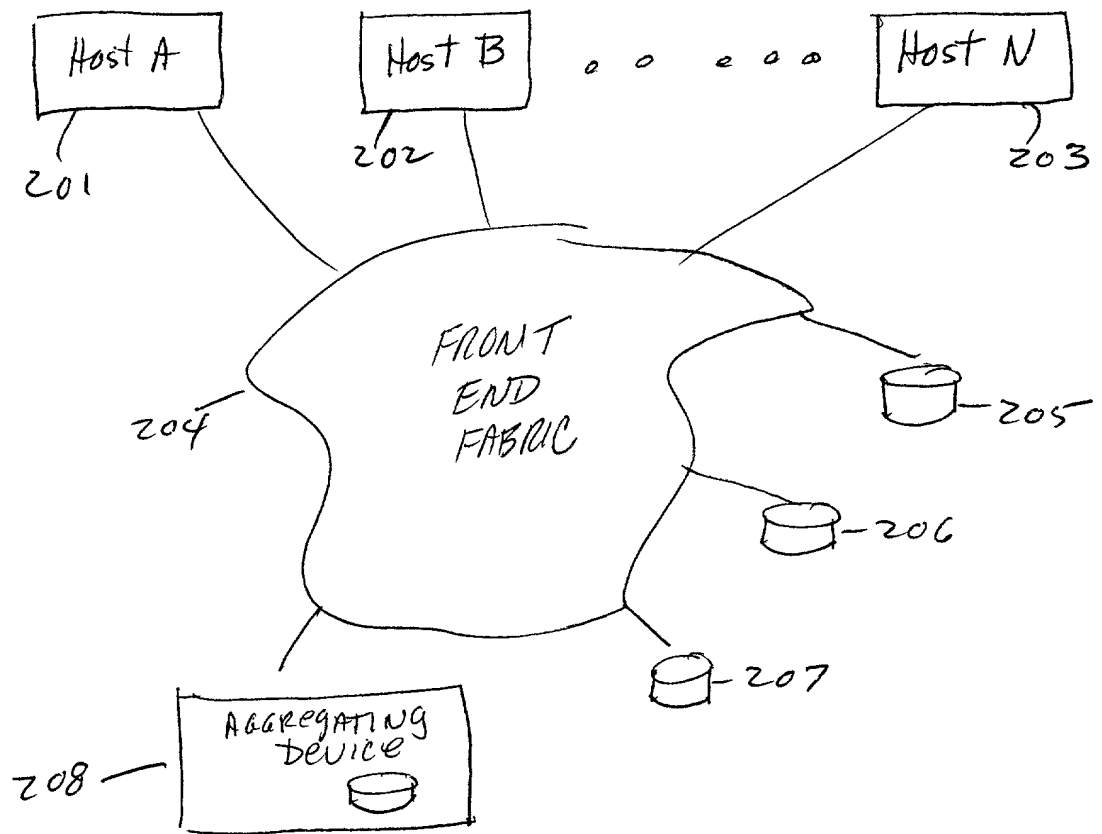
700

402

403

406

SWITCH CONTROL LOGIC

FIG. 7

Figure 8

DECLARATION AND POWER OF ATTORNEY

We, the below named inventors, hereby declare that:

Our residences, post office addresses, and citizenships are as stated below next to our respective names.

We believe we are the original, first, and joint inventors of the subject matter which is claimed and for which a patent is sought on the invention entitled **SWITCH-BASED ACCELERATION OF COMPUTER DATA STORAGE EMPLOYING AGGREGATIONS OF DISK ARRAYS**, the specification of which is attached hereto.

We hereby state that we have reviewed and understand the contents of the above identified specification, including the claims.

We acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

We hereby appoint the following attorneys:

> Joel Wall, Reg. No. 25, 648
> Robert L. Dulaney, Reg. No. 28,071
> John M. Gunther, Reg. No. 26,175
> Leanne J. Fitzgerald, Reg. No. 40,606
> Krishnendu Gupta, Reg. No. 37,977
> Penelope Wilson, Reg. No. 29,751

to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

We request that all correspondence be directed to:

> **EMC Corporation**
> **Law Department**
> **35 Parkwood Drive**
> **Hopkinton, MA 01748**
>
> **ATTENTION: ROBERT L. DULANEY**

and all telephone calls be directed to:

> **JOEL WALL   (508)-435-4432**

1

We hereby declare that all statements made herein of our own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements are made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of **first** inventor: **GEORGE M. ERICSON**
Residence: 119 Bumble Bee Circle, Shrewsbury, MA, 01545, U.S.A.
Post Office Address: same as above
Country of Citizenship: U.S.A.

_____
First Inventor's Signature

Date: Sept 25, 2000

Full name of **second** inventor: **ROBERT C. SOLOMON**
Residence: 11 Cottage Road, Kensington, NH, 03833, U.S.A.
Post Office Address: same as above
Country of Citizenship: U.S.A.

_____
Second Inventor's Signature

Date:_____

Full name of **third** inventor: **JEFFREY A. BROWN**
Residence: 3 Birch Brush Road, Shrewsbury, MA 01545, U.S.A.
Post Office Address: same as above
Country of Citizenship: U.S.A.

_____
Third Inventor's Signature

Date: Sept. 25, 2000

Full name of **fourth** inventor: **JOHN E. HAYNES JR.**
Residence: 46 Millstone Lane, South Weymouth, MA, 02190 U.S.A.
Post Office Address: same as above
Country of Citizenship: U.S.A.

_____
Fourth inventor's Signature

Date:_____ 9/25/00 _____